

# Upgrade SmartLogger3000 through the WebUI



**Huawei Technologies Co. Ltd.**


| Version | Created by       | Date       | Remarks |
|---------|------------------|------------|---------|
| 01      | Huawei e84081311 | 09.06.2020 | Upgrade |

The information in this document may contain predictive statements including, without limitation, statements regarding the future financial and operating results, future product portfolio, new technology, etc. There are a number of factors that could cause actual results and developments to differ materially from those expressed or implied in the predictive statements. Therefore, such information is provided for reference purpose only and constitutes neither an offer nor an acceptance. Huawei may change the information at any time without notice.


This document describe the procedure for upgrading the Smartlogger3000 through the WebUI.

## Procedure

**Step 1.** Login to the WebUI, specify the user name (**Admin**) and password (factory default: **Changeme**), select a language, and then click **Log In**. After you login first time you need to change the password.

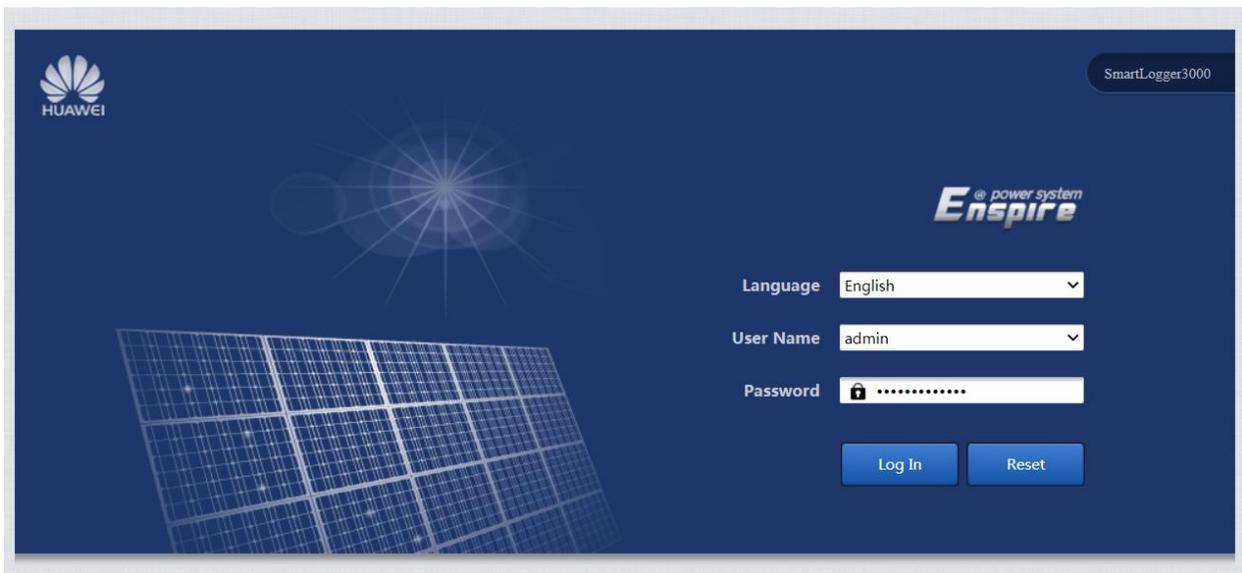

**Step 2.** On the home page, choose **Maintenance**→**Firmware Upgrade**

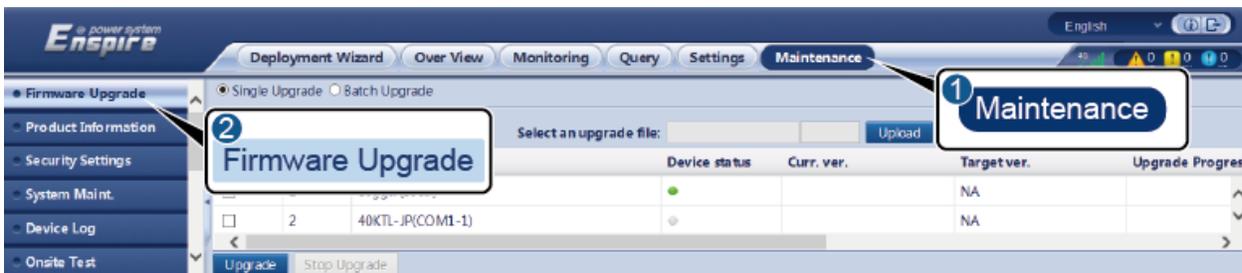


IL03J00037


**Step 3.** On the **Firmware Upgrade** page, click **Choose File**, go to the path where the upgrade package is stored, and select the upgrade package. Then, click **Open**

and then **Upload**.

The Smartlogger3000 upgrade package name extension is .zip. An example package name is: **Smartlogger3000.zip**

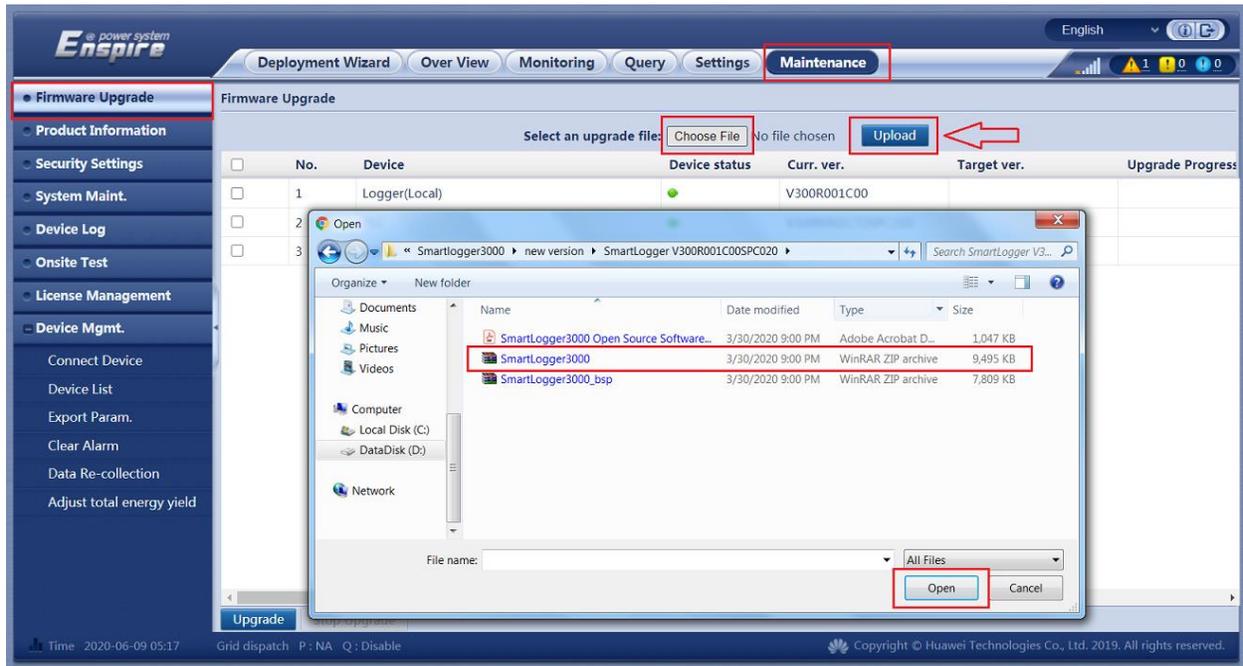


In the displayed dialog box, click **Confirm**.

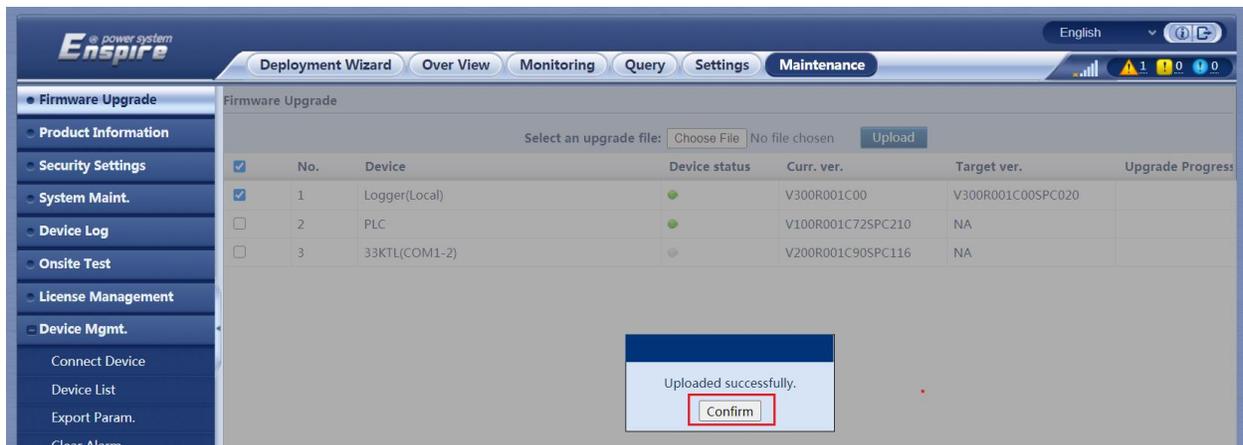

**Step 4.** Select the device to be upgraded and click **Upgrade**.

After the upgrade package is uploaded, the version number of the upgrade package is displayed, select the Logger and click **Upgrade**:

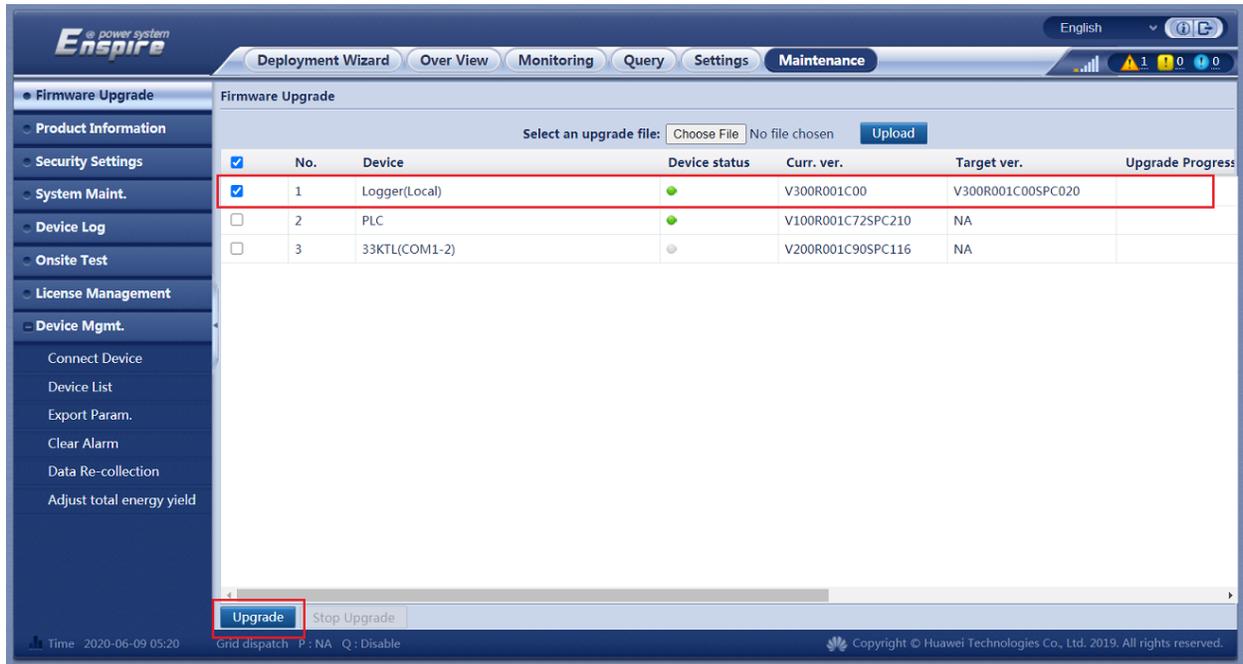


The screenshot shows the 'Firmware Upgrade' section of the Huawei Enspire web interface. A table lists three devices for upgrade:

| No.                                   | Device        | Device status | Curr. ver.        | Target ver.       | Upgrade Progress |
|---------------------------------------|---------------|---------------|-------------------|-------------------|------------------|
| <input checked="" type="checkbox"/> 1 | Logger(Local) | ●             | V300R001C00       | V300R001C00SPC020 |                  |
| <input type="checkbox"/> 2            | PLC           | ●             | V100R001C72SPC210 | NA                |                  |
| <input type="checkbox"/> 3            | 33KTL(COM1-2) | ●             | V200R001C90SPC116 | NA                |                  |

The 'Upgrade' button at the bottom left is highlighted with a red box.

**Step 5.** Check the upgrade progress. The progress bar displays the upgrade progress.

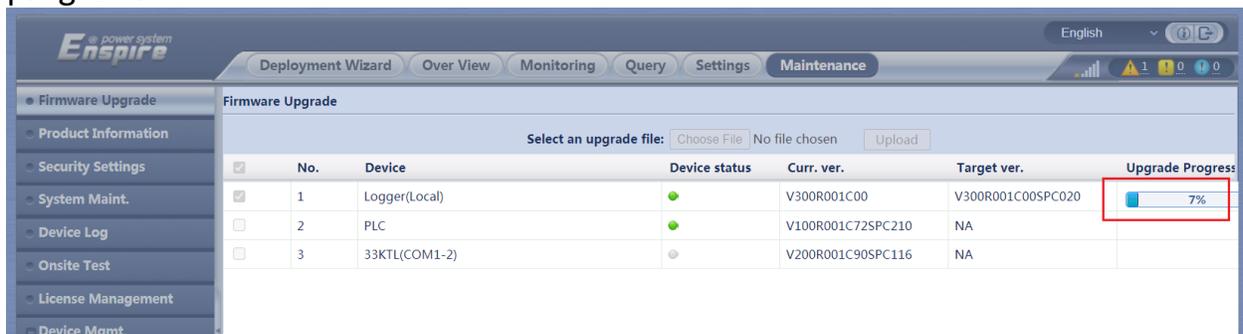


The screenshot shows the 'Firmware Upgrade' section of the Huawei Enspire web interface. The table from the previous screenshot is shown, but now the 'Upgrade Progress' for the selected device is visible:

| No.                                   | Device        | Device status | Curr. ver.        | Target ver.       | Upgrade Progress   |
|---------------------------------------|---------------|---------------|-------------------|-------------------|--|
| <input checked="" type="checkbox"/> 1 | Logger(Local) | ●             | V300R001C00       | V300R001C00SPC020 |  7% |
| <input type="checkbox"/> 2            | PLC           | ●             | V100R001C72SPC210 | NA                |  |
| <input type="checkbox"/> 3            | 33KTL(COM1-2) | ●             | V200R001C90SPC116 | NA                |  |

The progress bar for the selected device is highlighted with a red box.

**Step 6.** After the upgrade is complete, the upgrade result is displayed in the **Current Status** column. The Smartlogger3000 will restart after upgrade.

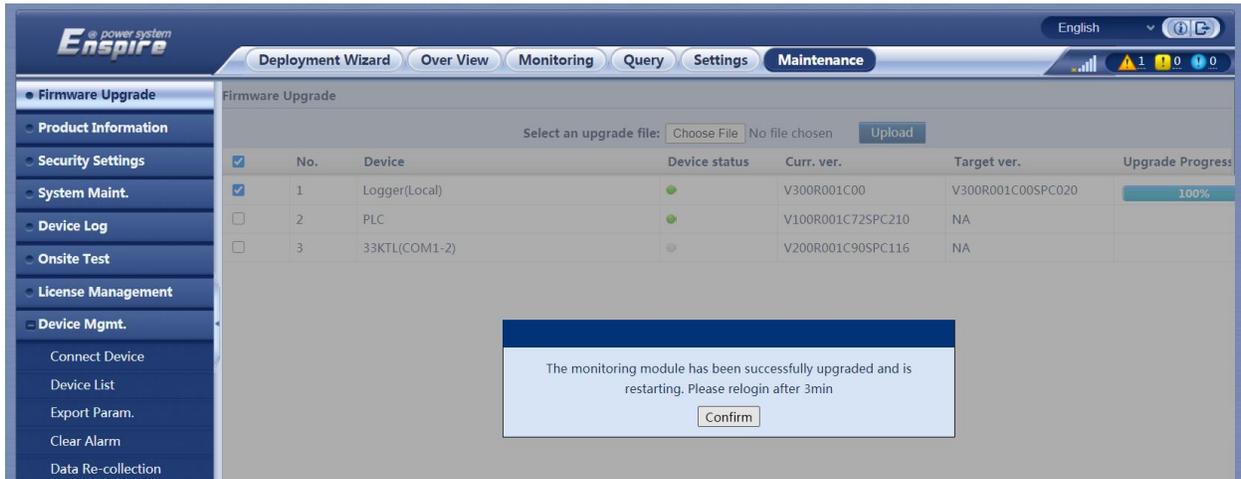

Contact the service team for any problem:

**Huawei Enterprise Technical Assistant Center will assist you 24x7**

**E-mail:** [eu\\_inverter\\_support@huawei.com](mailto:eu_inverter_support@huawei.com)

**24\*7 Hotline:**

**Europe +80 03 38 88 888 (except below countries)**

**Croatia/Latvia/Bulgaria +80 07 77 78 899**

**Iceland 800201866 Slovakia +40 31 22 61 915 Moldova 080061466**

**Serbia 800190899 Lithuania 880031499 Romania 0800400897**

**Australia 1800046639 Canada +40 31 22 61 915 New Zealand 080061466**

**America 1 877 9huawei**